



ISO 9001 CERTIFIED

BAR'S LEAKS TECHNICAL BULLETIN

Tech Bulletin #: TB-1630-0

Page 1 of 1

Date 1st Issued: August 14, 2012

Date Revised: June 04, 2018

Bar's Leaks Power Steering
Stop Leak Concentrate


Part 1630

POWER STEERING STOP LEAK CONCENTRATE

Bar's Leaks® Power Steering Stop Leak Concentrate is specially designed to stop seal and o-ring leaks caused by normal power steering wear and age. Works on rack & pinion units, gear boxes and pumps. Keeps power steering seals soft and pliable. Non-corrosive, non-clogging and non-foaming.

Works with ALL domestic, import and heavy duty power steering fluid; including petroleum, mineral oil, synthetics and ATF automatic transmission fluid.

- Stops & Seals Steering Fluid Leaks
- Restores O-rings & Seals to Stop & Prevent Steering Leaks

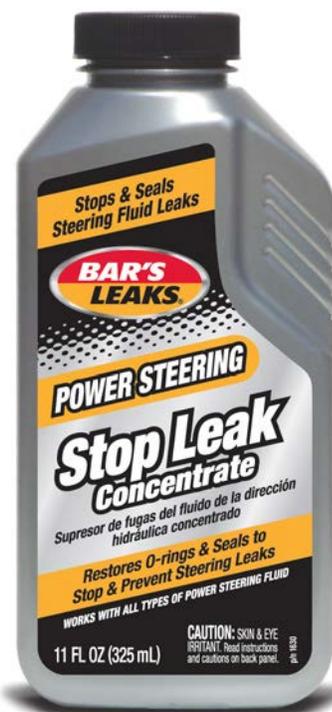

INSTRUCTIONS

Add Stop Leak to power steering reservoir to restore fluid level. Do not overfill. Leaks usually stop in 200 miles or 3 days of driving. If leak continues, a second application may be required or mechanical attention is needed.

DOSAGE

1 bottle treats up to 3 quarts of fluid. For larger systems, use 1 bottle for every 3 quarts of fluid capacity.

Part Number: 1630
 UPC Item: 0 46087 01630 5
 UPC Case: 1 00 46087 01630 2
 Bottle Size: 11 fl. oz. (325 ml)
 Bottle Dimensions: 3.0 x 1.8 x 6.5
 Bottle Cube: 35
 Case Pack: 6 bottles
 Case Size: 6.2 x 5.5 x 6.9
 Case Cube: 235
 Case Weight: 4.7 pounds
 Pallet: T1 48 HI 7 Total 336
 Pallet Height: 53 inches